



Brass pressure gauge



Application:

- Suitable for steam driven

Features:

- All brass construction
- According to EN13190
- For steam
- Dry gauge

Specifications:

Dial size: 2.5", 4", 6",
Accuracy class: 1.6%(2.5");
1.0% (4", 6")
Window: Laminated safety glass,
tempered glass or pc


Case: Brass
Wetted parts: Brass
Connection: 1/4"NPT or BSP
Dial: Aluminum, white
Pointer: Aluminum, black

Options:


with flange model:



Dimensions:



2.5 Inch brass gauge
with outside bayonet ring

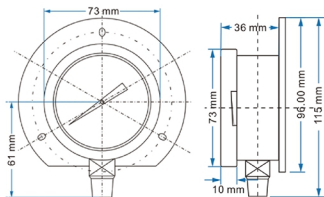

2.5 Inch flange brass gauge
with outside bayonet ring




How to order brass pressure gauge:

	CODE	CHARACTERISTICS	
Basic type	B	Brass pressure gauge	
Diameter	25 4 6	2.5" 4" 6"	
Mounting	BM	Bottom mounting	
Mounting options	BF	With back flange	
Bezel styles	IBR OBR	Inside bayonet ring (only for 4", 6") Outside bayonet ring	
Process Connection	G14 G38 G12 Z14 Z38 Z12 M14 M20	G 1/4 G 3/8 G 1/2 1/4NPT 3/8NPT 1/2NPT M14x1.5 M20x1.5	
Windows	SG TG PC	Laminated safety glass (only for bayonet ring) Temperated glass (only for bayonet ring) PC	

Special Requirements additional Information:

1. Range:

Order example:

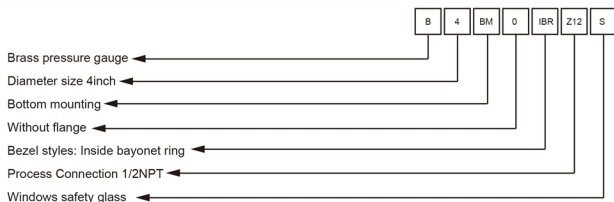

Additional Information: 0-300PSI